

## Lab 01A: Coulomb's law

Revised for Spring 2016

### Charging with electrophorus

You will find additional information about this at the Exploratorium:

[http://isaac.exploratorium.edu/~pauld/summer\\_institute/summer\\_day14electrostatic/Electrophorus.html](http://isaac.exploratorium.edu/~pauld/summer_institute/summer_day14electrostatic/Electrophorus.html)

A pie pan and a Styrofoam plate can be used to charge effectively even in conditions of higher humidity. The idea is this: rub wool onto the plate for about 1 minute. Place the pie pan onto the top of the styrofoam (a block of styrofoam works better than a styrofoam plate). Touch the pie pan (a spark will jump). Then remove your finger and separate the pie pan from the plate. We will use these again in lab01-B.

### Experimental verification of the inverse square law


Without vectors, **Coulomb's law** states that the magnitude of the force of attraction or repulsion between charges is given by

$$|\vec{F}| = \frac{k|q_1 q_2|}{r^2}$$

where  $k$  is Coulomb's constant ( $k=8.99 \times 10^9 \text{ Nm}^2/\text{C}^2$ ,  $q_1$  is the charge 1,  $q_2$  is charge 2 and  $r$  is the distance of separation between the two charges. Incidentally, Coulomb's constant is often written

$$k = \frac{1}{4\pi\epsilon_0},$$

where  $\epsilon_0$  is the permittivity of free space and has the value  $8.854187817 \times 10^{-12} \text{ C}^2/(\text{Nm}^2)$ . We can know the value of  $\epsilon_0$  to so many decimal places by measurements involving the speed of light.

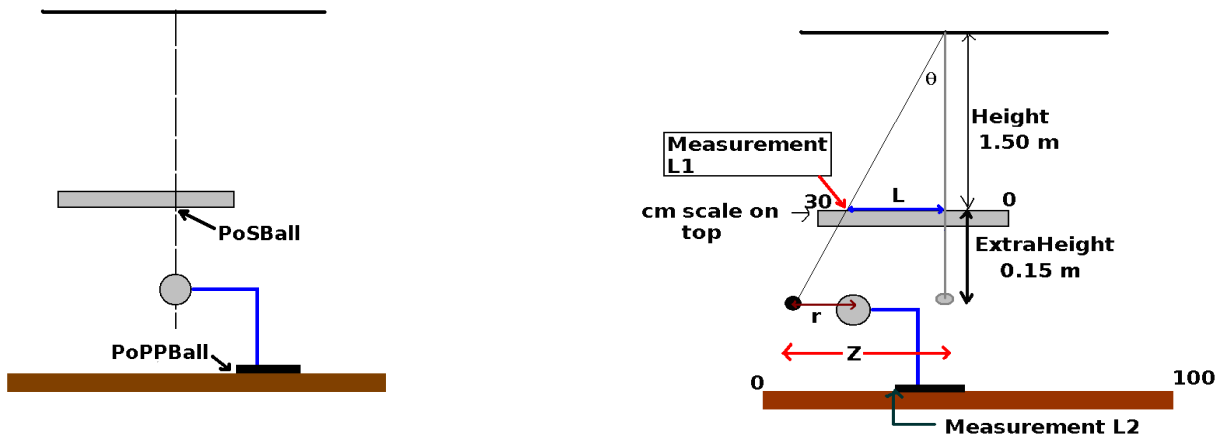

These two figures show the various defined quantities. As I have tried to set things up, the initial variables should be: **Height=1.50 m**, **ExtraHeight=0.15 m**, **PoSBall=0.10 m**, and **PoPPBall=0.45 m**. You will need to check most of these but I think you should trust my measurement of 1.50 m. Make sure after you finish your lab that the initial settings are returned. You will be making 10 measurements here of L1 and L2.

Measurement	L1 [cm]	L2 [cm]
t		
1		35
2		36
3		37
4		38
5		39
6		40
7		41
8		42
9		43
10		44

The quick way of doing these measurements is to start with the ping pong ball holder base at 35 cm and move it back towards the 44 cm mark. But do this quickly so that charge does not leak off from the system.

The analysis of this setup is as follows: the angle  $\theta$  is measured from Height and L:

$$\tan(\theta) = \frac{L}{\text{Height}} = \frac{L[\text{m}]}{1.5[\text{m}]} .$$

The magnitude of the restoring force when the small ball is displaced by an angle  $\theta$  is given by:

$$|\vec{F}| = mg|\sin(\theta)| .$$

L is obtained from your measurement of L1 by:

$$L = |L1 - \text{PoSBall}| .$$

This plane of measurement needs to be extended so that it represents the measurement Z in the diagram because what is important is the separation between the two balls and this comes from Z. The relationship is this:

$$\tan(\theta) = \frac{Z}{[\text{Height} + \text{ExtraHeight}]} \Rightarrow Z = [\text{Height} + \text{ExtraHeight}] \tan(\theta)$$

So we can find Z directly by:

$$Z = L \frac{[\text{Height} + \text{ExtraHeight}]}{\text{Height}} = L + L \frac{\text{ExtraHeight}}{\text{Height}}$$

The separation between the two balls is given by:

$$r = |Z - [L2 - \text{PoPPBall}]|$$

This is true because when L2 is PoPPBall (which is 0.45),  $Z=L$ . As L2 changes, this difference (L2-PoPPBall) measures then the exact amount that needs to be subtracted from Z to give the separation between the centers of the two balls.

If Coulomb's law is valid then we would have the following:

$$mg[\text{Height} + \text{ExtraHeight}] \sin(\theta) = \frac{kq_1q_2}{r^2} .$$

In the analysis we thus have:

$$\sin(\theta) = \frac{kq_1q_2}{mg[\text{Height} + \text{ExtraHeight}]} = \frac{\text{Constant}}{r^{\text{power}}} .$$

What I want to do is to actually pull out that power dependence in the simplest way possible. For our purposes today, although we will determine the constant, it will not be essential and it will vary from one experiment to another since it depends upon charge and mass. In lab 1B, a simple experiment will be done to let you measure charge directly. Today, it is the power that we want to verify.

To do this, I take the natural log of this equation:

$$\ln[\sin(\theta)] = \text{Constant} - \text{Power} \bullet \ln(r) .$$

This is in the form of the equation for a straight line:

$$y = mx + b ,$$

where the identification of the terms is as follows:

$$y \equiv \ln[\sin(\theta)] : m = -\text{Power} : b = \ln[\text{Constant}] .$$

In an ideal situation, the power would be 2 (my results gave about 1.7). In the spreadsheet, I fit this equation and then provide the plot for

$$\sin(\theta) = \frac{\text{Constant}}{r^{\text{power}}},$$

from both the data and the theoretical fit.

### Procedure:

Record (and verify) the following:

**PoPPBall:** Position of the front of the base of the ping pong ball stand: it should be about **45** cm. This is adjusted so that the string, if lowered, would pass through the center of the ping pong ball. This is read from the meter stick on the table. Record your value: Do this after your measurements below.

**PoPPBall**= \_\_\_\_\_ cm

**PoSBall:** Position of the small ball at equilibrium. This is read from the metal ruler. If things are set correctly it would read **23**, but record your value. Do this after your measurements below.

**PoSBall**= \_\_\_\_\_ cm

Height from the ceiling to the top of the metal ruler: this is set to be 150 cm. However if you do not believe my measurement, you may measure and record this distance (trust me). I placed a mark on the string at the top to the ruler to keep this correct. **Hint: trust me.**

**H**= \_\_\_\_\_ **150** cm

Distance between the top of the metal ruler to the center of the small ball: I have set this to be **15** cm but you can measure this to verify. On the spreadsheet I name this "ExtraHeight". Do this after your measurements below.

**ExtraHeight**= \_\_\_\_\_ cm

This is the way to make your measurements the quickest way: charge the system and move the ping pong ball holder about 10 cm to the 35 cm mark (PoPPBall) **so that L2 reads 35**. I have arranged the system so that the front of the base reads 45 cm when the string would hang through the center of the ping pong ball and you should verify this and make adjustments as necessary. **Quickly and without breathing on your system** record the two numbers L1 and L2, and then move the Ping Pong base towards PoPPBall by 1 cm at a time. You should gently tip the thread at the ruler top to avoid snags. Do not move further than PoPPBall. This will give you 10 measurements. **Do this quickly and do not breathe on your system** since charge will change as a result of humidity.

### The analysis

Your writeup for this lab will consist of your spreadsheet, together with your data submitted as a single spreadsheet (in readable pdf format), and additionally your work should include a discussion of if your data shows a linear relationship and why and how well your experiment verifies Coulomb's law. It should also include a discussion of the procedure that you used to determine this. Also be sure to include in your discussion why it is important that the charge on the two balls stay constant while you are doing your experiment (this is, in fact, the major source of error here). Your slope should automatically be calculated for you giving the experimental error. This is done with the OpenOffice "slope" function. Although you will also obtain the constant, this is not useful for our purposes today, except to the extent that **if it is not really a constant** for your experiment, your results will be really really bad. Other than that, your lab writeup should be presented in the standard format for lab reports that you have already learned.

## **Error calculations and how I made the x and y error bars**

On the spreadsheet I have done additional calculations. I estimated the errors for both separation and the resulting error in the sin of the angle. I repeated the fit with the maximum uncertainty and the minimum uncertainty in the separation to provide the uncertainty in the power and the constant, and also the % uncertainty in the error. I recommend not changing the estimated errors since the error bars (both x and y) are then not going to be set right. The way I made the x error bars is this: I obtained the java program for a ruler (from <http://noutash/freebies/nruler>) that I placed on the excel spreadsheet after calibrating the ruler scale to the length of the x-axis. I then wanted my x error bars to be of  $\pm$  the length of the estimated error in separation. In the icon choice for the data symbol, I picked the symbol that looked like a bowtie and made the width about .1 cm and changed the length (measured directly by the ruler) to be the calculated size based upon my ruler calibration. I then fixed the x axis scales so that this length would be preserved. Including the y-error bars was much easier since it can be done automatically. I am providing this as an example for your own future work. Note that if you resize the graph, the x-calibration will be incorrect **so do not resize the graph; after a screen capture is completed, you can resize the screen capture.**